


DIMENSIONS

All dimensions are approximate. Dimensions may vary with bucket and tire choice. Refer to operating specifications.

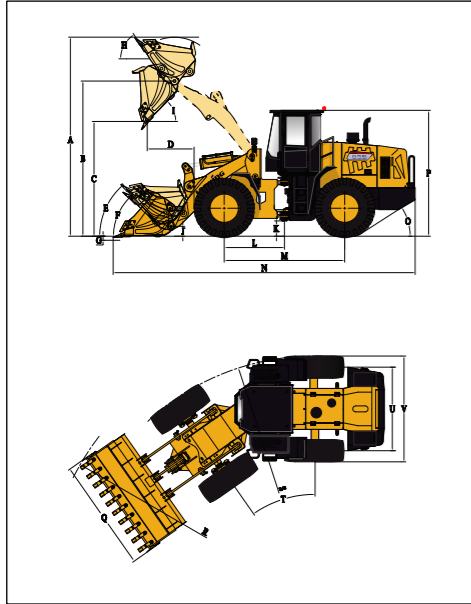

NO.	DESCRIPTION	UNIT	DATE
A	Overall Height – Bucket Raised	mm	5210
B	Bucket Pin Height at Max. Lift	mm	4136
C	Dump Clearance at Max. Lift (45°)	mm	3078
D	Reach at Max. Lift and 45° Dump	mm	1190
E	Rack Back Angle at Carry	°	48.3
F	Rack Back Angle at Ground	°	45
G	Digging Depth	mm	45
H	Rack Back Angle at Max. Lift	°	52.6
I	Dump Angle at Max. Lift	°	45
J	Carry Height	mm	400
K	Ground Clearance	mm	556
L	Center Line of Front Axle to Hitch	mm	1120
M	Wheel Base	mm	2930
N	Overall Length	mm	7870
O	Departure Angle	°	28.6
P	Height to Top of Cab	mm	3380
Q	Overall Width over Bucket	mm	3000
R	Min. Turning Radius over Bucket	mm	6805
S	Min. Turning Radius over Tires	mm	6182
T	Steering Angle – Left/Right	°	35
U	Width at Tread Center	mm	2240
V	Overall Width over Tires	mm	2835

TECHNICAL PARAMETERS

BASIC	Bucket Capacity	2.7m ³
	Rated Payload	5000kg
	Operating Weight	16600±300kg
	Traction Force	155±3kN
	Breakout Force	155±3kN
	L×W×H	7870×3000×3380mm
ENGINE	Maker/Model	WEICHAI/WD10G220E21
	Rated Power	162kW/2200rpm
	Maximum Torque	860N·m/1400-1600rpm
	Bore x Stroke	126×130mm
	No. of Cylinders	6/9.726L
	/Displacement	
	Air Cleaner	Three Stage Air Cleaner
	Alternator	70Amp
	Battery	2-24V/120Ah
	Starting Motor	24V/7.5kW
DRIVE TRAIN	Transmission Type	Planetary Powershift
	Shift Type	Mechanical Powershift Control
	Pressure of Transmission	1.1-1.5MPa
	Torque Converter Type	Single-stage, Duo-turbine, 4-element
	Axles	Rigid (Front)&Oscillating (Rear)
	Rear Axle Oscillation	±10°
	Differential	Conventional
	Main Reducer	Spiral Bevel, 1-stage Reduction
	Final Reducer	Planetary Reduction
	Tire	23.5-25 L-3 16PR TT
BRAKE SYSTEM	Travel Speed-Forward	11.5/36 km/h
	Travel Speed-Reverse	16 km/h
	Service Brake	Single Circuit Caliper, Dry Brake
	Setting Pressure	0.70-0.78MPa
STEERING SYSTEM	Parking Brake	Flexible Shaft Controlled
	Emergency Brake	Caliper Brake
	Type	Hydraulic Load Sensing System
	Pump	176L/min-2200rpm
HYDRAULIC SYSTEM	System Pressure	15MPa
	Cylinder Type	Double Acting
	Steering Angle	±35°
	Type	Joystick Control (Single-lever)
SERVICE REFILL CAPACITY	Pump	220L/min-2200rpm
	Control Valve	2 Spool
	System Pressure	16MPa
	Cycle Time	11.5
	Fuel Tank	280L
	Hydraulic Tank	245/250(3rd Spool)L
Crankshaft	20L	
Transmission	46L	
Front Axle/Rear Axle	28L/28L	

CONFIGURATION

WEICHAI Engine
LONKING Transmission
Mechanical Powershift Control
LONKING Axles (Dry type)
Joystick Working Control (Single-lever)
Flexible Shaft Controlled Caliper Brake
ROPS&FOPS Cabin
Combination Instrument
Air Conditioner

OPTIONAL

Mechanical Shift Working Control
High Dump
Oil-bath Air Filter
Radial Tires
3rd Spool for Auxiliary Function
Sliding Cabin Window
Electric Heating Rear Window
Lockable Oil Tank Cap
Rear View Camera
Bucket(3 Piece Cutting Edges)
Russian Bucket(3.0m ³)
Enlarged Bucket(3.5m ³)
Coal Bucket(4.2m ³)
Log Grapple
Grass Grapple
Marble Fork
Log Fork
Quick Hitch Coupler
Quick Hitch Bucket(2.7m ³)
Snow Blade(Quick Hitch Only)

LONKING 龙工

Basic Code: 10805313835

CDM853

WHEEL LOADER

Efficiency Rules the Future



For more information on Lonking products,
Please contact our local agent:

The following blank can be used for notes or comments.

Lonking, Lonking CDM Series and their respective logos, as well as corporate identity in this leaflet are trademarks of Lonking Holdings Ltd., and may not be used without written permission.
2020/03

Specifications and design are subject to change without prior notice.
Machines shown may not include optional accessories.

LONKING (FUJIAN) INTERNATIONAL TRADE CO., LTD.

LONKING HOLDINGS LIMITED

Add: 26 Minyi Road, Xinqiao, Songjiang Industrial Zone, Shanghai

Tel: +86-21-3760 2242 E-mail: export@lonking.cn

http://www.lonkinggroup.com

- RATED POWER: 162kW/2200rpm
- BUCKET CAPACITY: 2.7m³
- RATED PAYLOAD: 5000kg
- OPERATING WEIGHT: 16600kg